

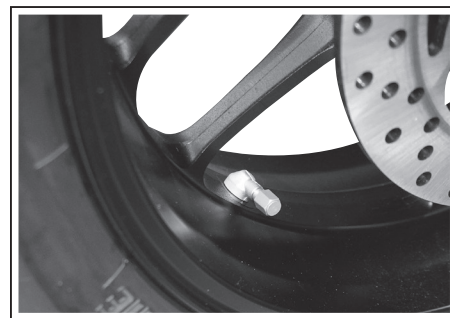
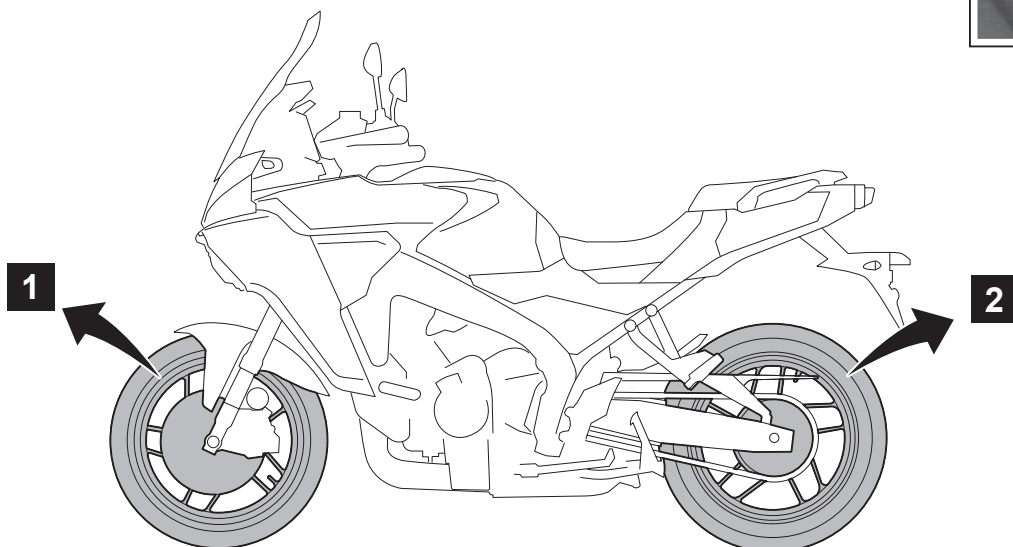


BRN-827A0-**

TIRE PRESSURE MONITOR KIT

Posnr.	QTY	
①	2	

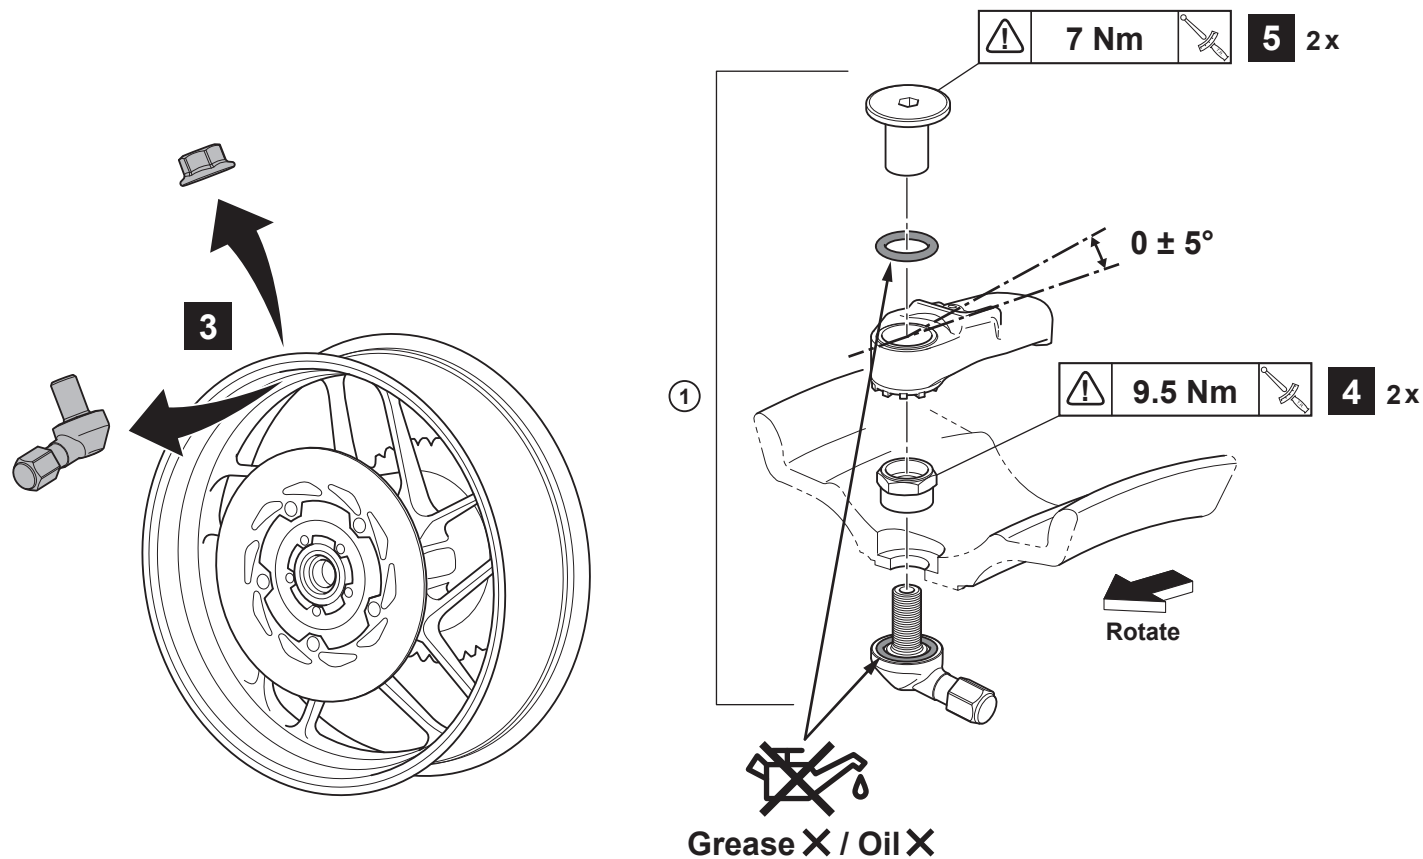

Easy, suitable for
novice with little
experience

Fairly easy,
suitable for
beginner with
some experience

Fairly difficult,
suitable for
competent DIY
mechanic

Difficult, suitable
for experienced
DIY mechanic


Very difficult,
suitable for expert
DIY or
professional




TIRE PRESSURE MONITOR KIT




1. Select TPMS from the MENU.

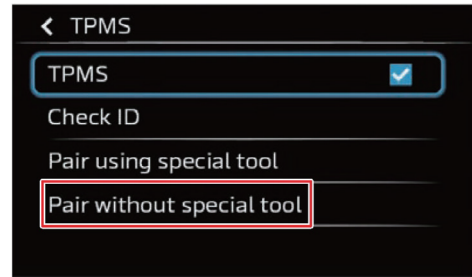


2. Select "Pair without special tool" and follow the on-screen instructions to start pairing.

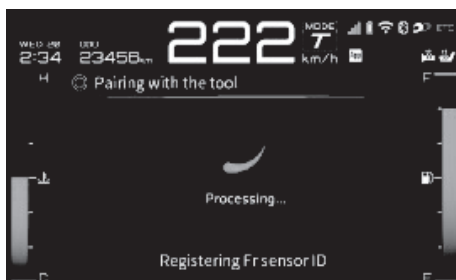

3. Decrease the front tire air pressure by 20 kPa, and then increase it by 20 kPa.

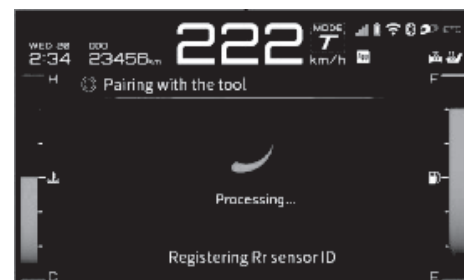

4. Decrease the rear tire air pressure by 20 kPa, and then increase it by 20 kPa.

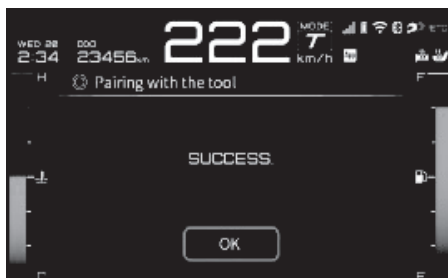

5. Check that the screen displays "SUCCESS".

Compliance with Regulation (EU) 2023/1542 concerning batteries and wasted batteries

Importer of the TPMS battery:

YAMAHA MOTOR EUROPE N.V.

Koolhovenlaan 101, 1119 NC Schiphol-Rijk, 1117 ZN, Schiphol, the Netherlands

Manufacturer of the TPMS battery:

PACIFIC INDUSTRIAL CO., LTD.

1300-1 Yokoi, Godo cho , Anpachi gun, Gifu, 503 2397 JAPAN

⚠ WARNING

The battery contains combustible materials such as lithium metal and organic electrolyte.

The following cautions should be followed in order to use this battery safely:

- Do not short circuit the battery
- Do not charge the battery
- Do not soak the battery in water
- Do not deform or damage the battery
- Do not modify the battery in any way