YAMAHA

MT07 2025-2026
YZF-R7 2026

FITTING INSTRUCTIONS

TO BE FITTED BY A QUALIFIED TECHNICIAN

GBRacing® World Class Motorcycle Protection


THIS SHEET INCLUDES FITTING INSTRUCTIONS FOR THE FOLLOWING PARTS:


Secondary Alternator Cover Part No. EC-MT07-2025-1-YME / Secondary Clutch Cover Part No. EC-MT07-2025-2-YME /
Secondary Water Pump Cover Part No. EC-MT07-2025-5-YME / Secondary Water Pipe Cover Part No. WPC-MT07-2025-YME


For YZF-R7: remove the fairing prior to fitment of all products, as per manufacturer's guidelines. Replace after fitment.

SECONDARY ALTERNATOR COVER - PART NO. EC-MT07-2025-1-YME

1. Remove 3 existing bolts from the stock alternator cover, shown as position Bolt 1, 2 & 3.
2. Place the secondary alternator cover over the stock cover.
3. Assemble 3 replacement bolts loosely in the correct position as shown.
4. Tighten bolts to a torque of 10Nm as per manufacturer's recommendations. DO NOT OVERTIGHTEN.

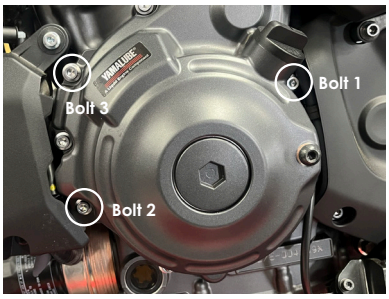


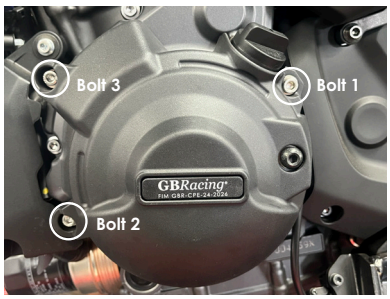


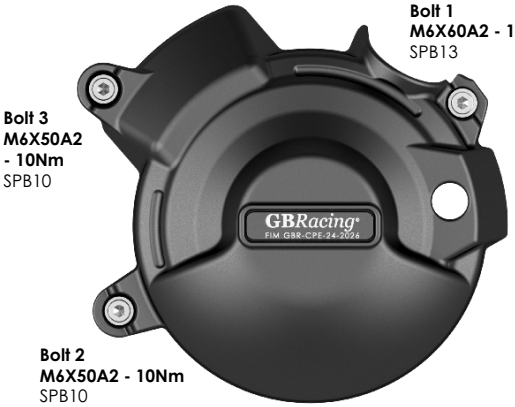

SECONDARY CLUTCH COVER
PART NO. EC-MT07-2025-2-YME

1. Remove 4 existing bolts from the stock clutch cover, shown as position bolt 1, 2 ,3 & 4.
2. Place the secondary clutch cover over the stock cover.
3. Assemble 4 replacement bolts loosely in the correct positions as shown.
4. Tighten bolts to a torque of 10Nm as per manufacturer's recommendations. DO NOT OVERTIGHTEN.

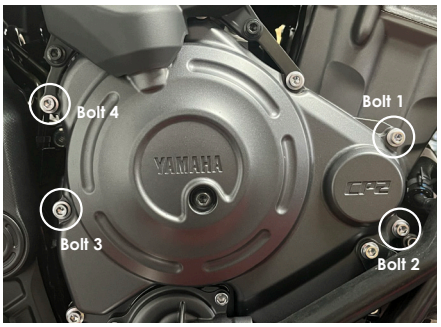

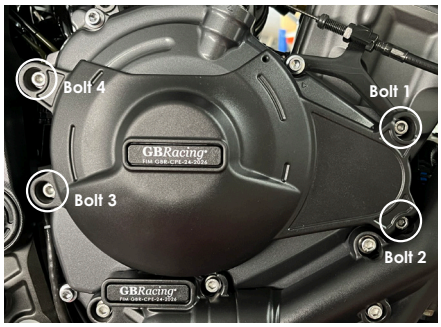



SET: **Engine Cover Set: EC-MT07-2025-SET-YME**

Secondary Alternator Cover Part No. EC-MT07-2025-1-YME / Secondary Clutch Cover Part No. EC-MT07-2025-2-YME

YAMAHA

MT07 2025-2026
YZF-R7 2026

FITTING INSTRUCTIONS

TO BE FITTED BY A QUALIFIED TECHNICIAN


GBRacing® World Class Motorcycle Protection


SECONDARY WATER PUMP COVER - PART NO. EC-MT07-2025-5-YME


Please note:

- *Always fit with a cold engine.*
- *Coolant may leak whilst fitting the protective cover, so prepare with a container underneath the bike.*

1. Remove 3 existing bolts from the stock water pump cover, shown as position Bolt 1, 2 & 3.
2. Place the secondary water pump cover over the stock cover.
3. Assemble 3 replacement **M6X30A2** bolts loosely in the correct position as shown.
4. Tighten bolts to a torque of 10Nm as per manufacturer's recommendations. DO NOT OVERTIGHTEN.
5. Check coolant levels.

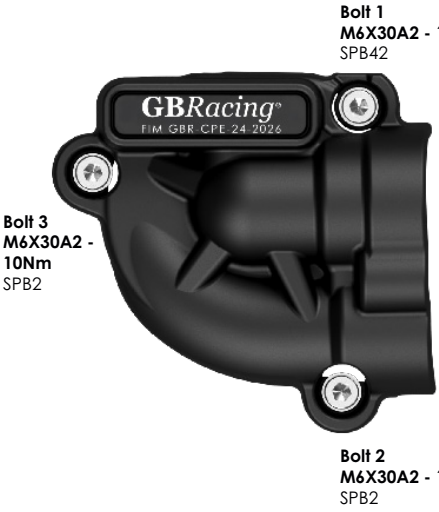

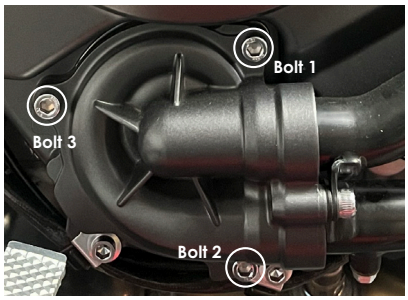


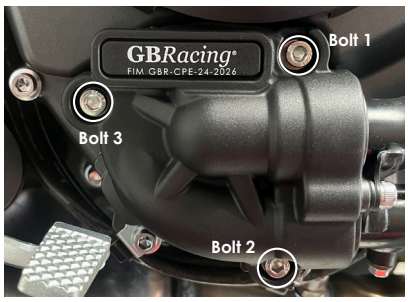


WATER PIPE COVER – PART NO. WPC-MT07-2025-YME

1. Ensure engine is cold.
2. Remove 3 existing bolts from the correct locations.
3. Place the water pipe cover over the water pipes.
4. Assemble 3 replacement bolts from the stock water pipe cover, shown as position bolt 1, 2 & 3.
5. Tighten bolts to a torque of 10Nm as per manufacturer's recommendations. DO NOT OVERTIGHTEN.



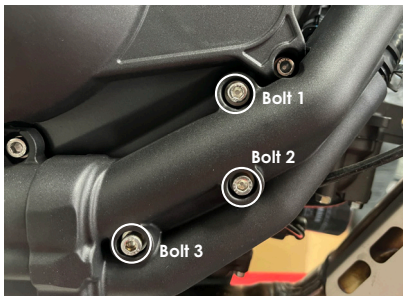

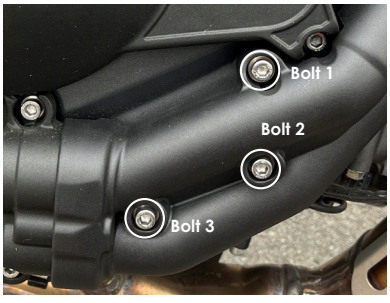

DO NOT use these products unless you agree to our Terms & Conditions, as shown on our paperwork and website. If you do not agree, please return the product(s) to your dealer for a refund.