INSTALLATION INSTRUCTIONSDESCRIPTION:Rear Axle Slider KitPART NUMBER:BN6-F21D0-V0, B3L-F21D0-V0MODEL:'17~ YZF-R6, '17~ YZF-R1



AWARNING

Please read and understand these instructions completely before installation to avoid possible injury, or damage to the accessory or vehicle.

NOTICE:

Installation of this kit requires a torque wrench. This installation should be performed by an authorized Yamaha dealer or a qualified mechanic.

WARRANTY INFORMATION:

In the United States, see your authorized Yamaha dealer for a copy of the Yamaha *Genuine Parts and Accessories Limited Warranty*


DEALER OR INSTALLER:


These instructions contain important information for future reference and *must* be given to the customer.

PARTS LIST:

| No. | Part Number | Description | Qty |
|-----|--------------------|----------------------|-----|
| | BN6-F21D0-V0, B3L- | Rear Axle Slider Kit | |
| | F21D0-V0 | | |
| 1 | * | Right Slider | 1 |
| 2 | * | Left Slider | 1 |
| 3 | * | Slider Bolt | 2 |
| 4 | * | Slider Rod | 1 |

* Part supplied with kit only and not available separately.

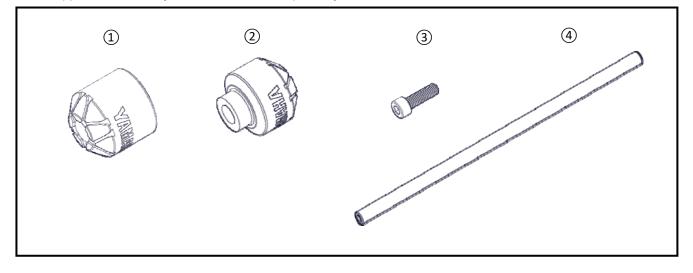

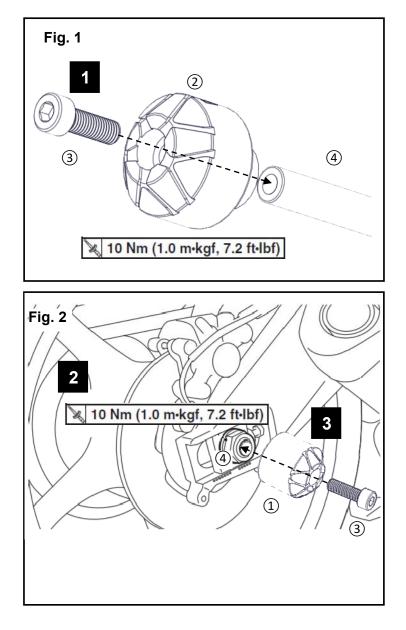

PREPARATION:

- Stand motorcycle on a secure and level surface.
- Clean all mounting surfaces before beginning installation.

INSTALLATION:

- Install the (3) Slider Bolt through the Left Slider
 (2) and thread into the (4) Slider Rod as shown in Fig. 1.
- 2 Install the assembled (4)+(3)+(2) slider into the center hole of the rear axle bolt. **Note**: You do not have to disassemble anything to install this kit.
- 3 Install the 1 Right Slider on to the 4 Slider Rod. Thread a 3 Slider Bolt through the center of the Right Slider and into the Slider Rod. Hold the Left Side (4+3+2) and Torque bolt to 10 Nm (1.0 m-kgf, 7.2 ft-lbf). See Fig. 2.

MAINTENANCE:

Periodically, check torque on all hardware. If loose hardware is found, re-torque to specification.

CARE AND CLEANING:

Clean sliders with a clean soft cloth and mild soap and water. Rinse and dry.

CUSTOMER SERVICE:

For further information see your Yamaha dealer.

ESTIMATED TIME TO INSTALL: 0.1 HRS.