
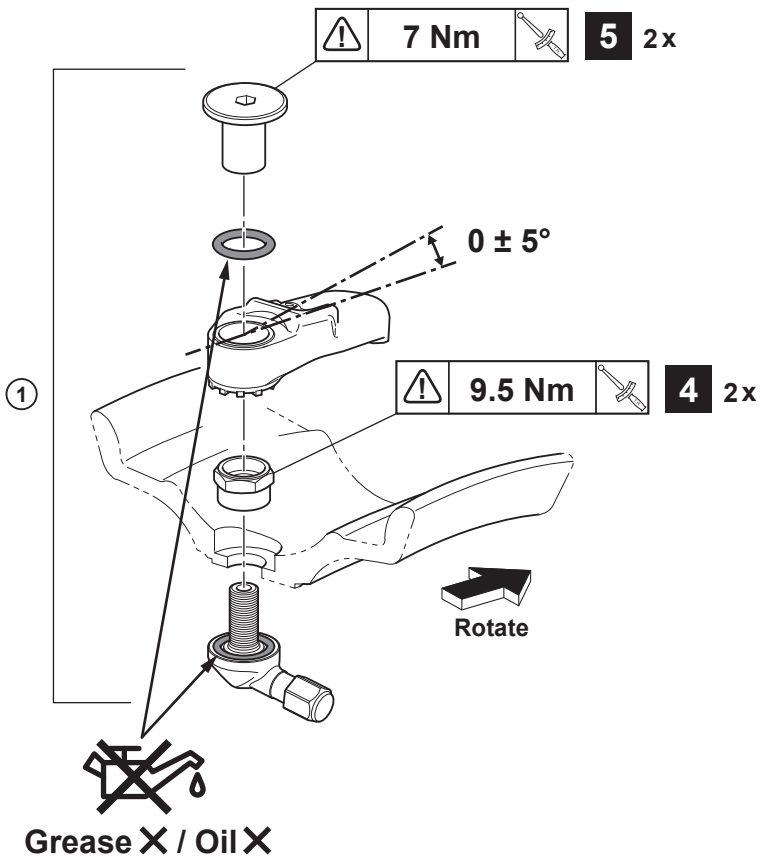
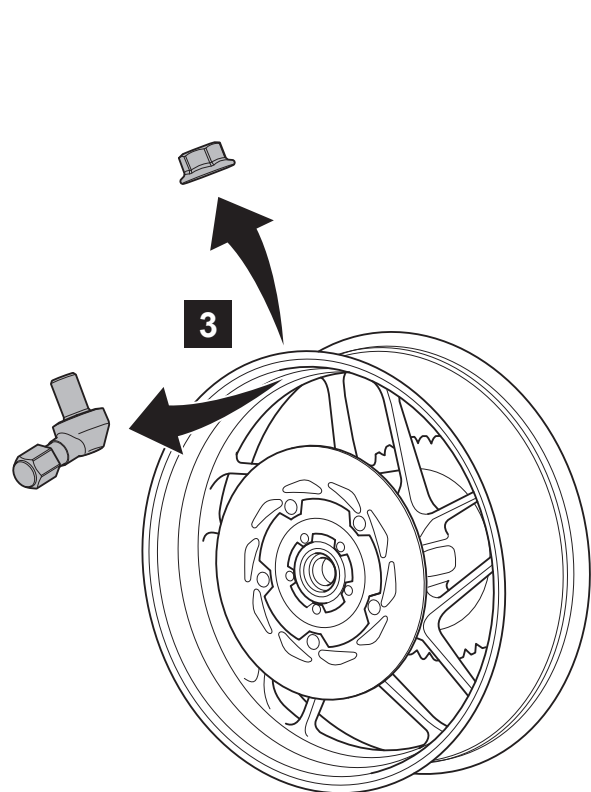
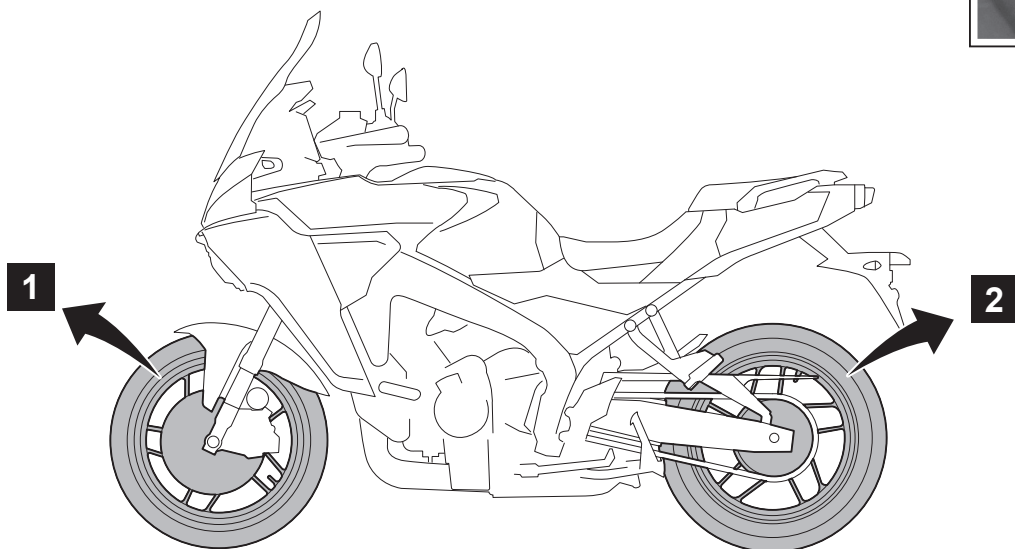


BRN-827A0-**

TIRE PRESSURE MONITOR KIT

Posnr.	QTY	
①	2	

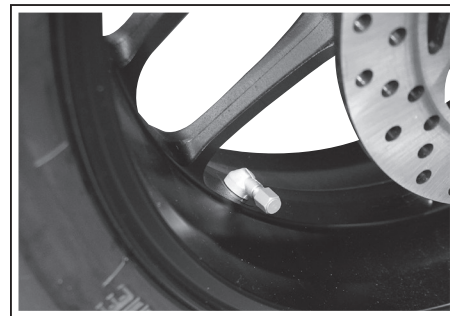

Easy , suitable for novice with little experience 	Fairly easy , suitable for beginner with some experience 	Fairly difficult , suitable for competent DIY mechanic 	Difficult , suitable for experienced DIY mechanic 	Very difficult , suitable for expert DIY or professional
--	---	---	--	---




TIRE PRESSURE MONITOR KIT




1. Select TPMS from the MENU.




2. Select "Tool less Pairing" and follow the on-screen instructions to start pairing.

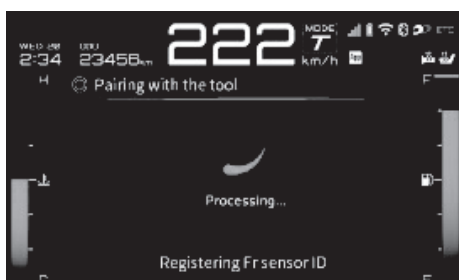

3. Adjust the front tire pressure to around ± 20 kPa.

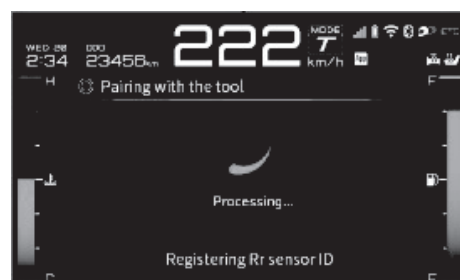

4. Adjust the rear tire pressure to around ± 20 kPa.

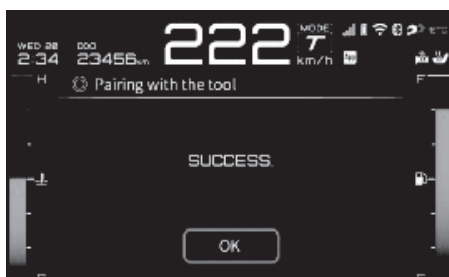

5. Check that the screen displays "SUCCESS".

Compliance with Regulation (EU) 2023/1542 concerning batteries and wasted batteries

Importer of the TPMS battery:

YAMAHA MOTOR EUROPE N.V.

Koolhovenlaan 101, 1119 NC Schiphol-Rijk, 1117 ZN, Schiphol, the Netherlands

Manufacturer of the TPMS battery:

PACIFIC INDUSTRIAL CO., LTD.

1300-1 Yokoi, Godo cho , Anpachi gun, Gifu, 503 2397 JAPAN

⚠ WARNING

The battery contains combustible materials such as lithium metal and organic electrolyte.

The following cautions should be followed in order to use this battery safely:

- Do not short circuit the battery
- Do not charge the battery
- Do not soak the battery in water
- Do not deform or damage the battery
- Do not modify the battery in any way